




RTM 5

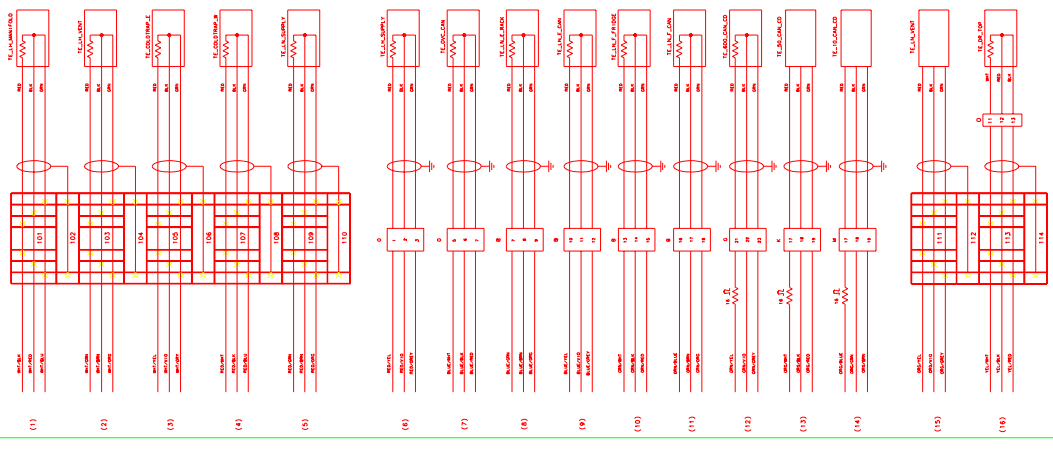

SWM 6

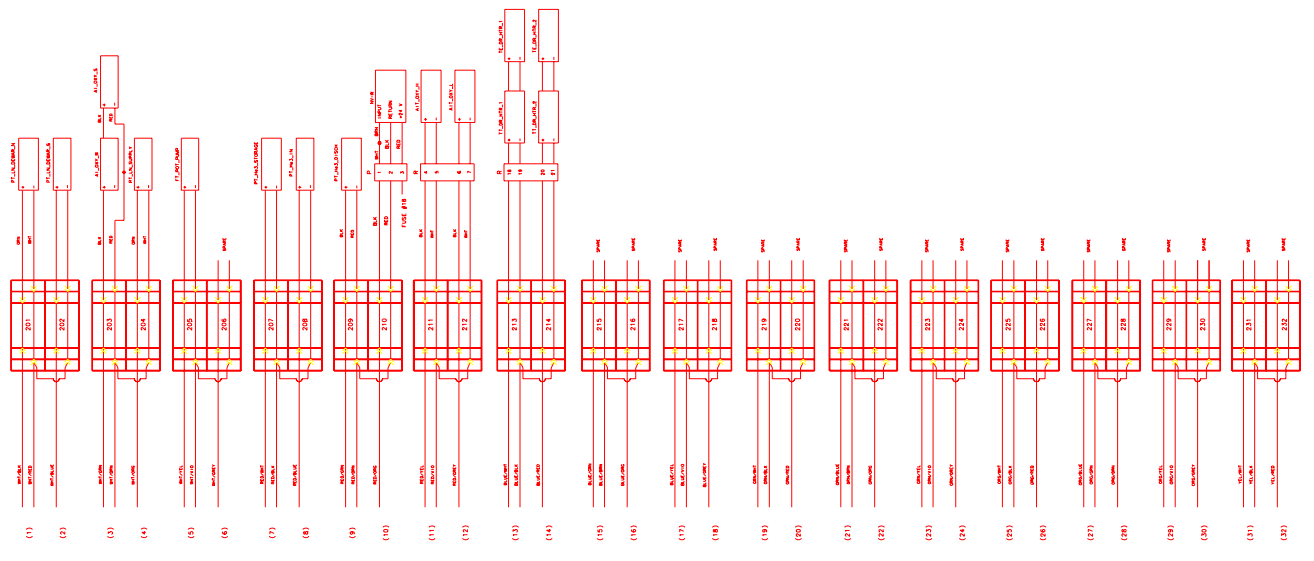

SWM 7

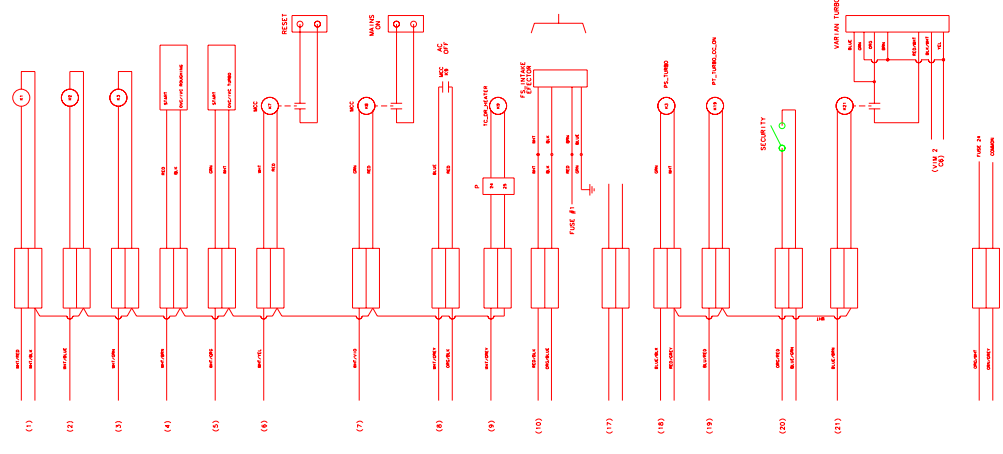

- | REV | DESCRIPTION |
|-----|-------------|
| 1 | 1. TEL |
| 2 | 2. COM |
| 3 | 3. GND |
| 4 | 4. TEL |
| 5 | 5. TEL |
| 6 | 6. TEL |
| 7 | 7. TEL |
| 8 | 8. TEL |
| 9 | 9. TEL |
| 10 | 10. TEL |
| 11 | 11. TEL |
| 12 | 12. TEL |
| 13 | 13. TEL |
| 14 | 14. TEL |
| 15 | 15. TEL |
| 16 | 16. TEL |
| 17 | 17. TEL |
| 18 | 18. TEL |
| 19 | 19. TEL |
| 20 | 20. TEL |
| 21 | 21. TEL |
| 22 | 22. TEL |
| 23 | 23. TEL |
| 24 | 24. TEL |
| 25 | 25. TEL |
| 26 | 26. TEL |
| 27 | 27. TEL |
| 28 | 28. TEL |
| 29 | 29. TEL |
| 30 | 30. TEL |
| 31 | 31. TEL |
| 32 | 32. TEL |

1-DOUBLE IN-VOLTA VOICEREGLESS OF FUSE #1
 2-AFTER WIRING IS DONE AND FUSE #2, FUSE #3, FUSE #4
 TO NEXT WIRE CHANGE TO DATA AND TESTING, PER IN.
 3-AND AND INSTALLATION INSTRUCTIONS TO FOLLOW.

| | | | | |
|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 |
| 6 | 7 | 8 | 9 | 10 |
| 11 | 12 | 13 | 14 | 15 |

PRIME NATIONAL ACCELERATOR LABORATORY
 UNITED STATES DEPARTMENT OF ENERGY
 PPD/MECHANICAL DEPARTMENT
 GDMS
 CRYOGENIC CONTROL WIRING

| | | | |
|----------------|-----------------------|-------|-------------|
| DESIGNED BY | R. SCHMITT | DATE | 12-JAN-2007 |
| DRAWN BY | R. SCHMITT | DATE | 12-JAN-2007 |
| CHECKED BY | R. SCHMITT | DATE | 12-JAN-2007 |
| APPROVED BY | R. SCHMITT | DATE | 12-JAN-2007 |
| SCALE | 1:1 | REV | 1 |
| DRAWING NUMBER | 9203.000-EE-397410 | SHEET | 2 OF 2 |
| PROJECT | PROCEEDING DEPARTMENT | D | |